



INSTALLING AN AUTOMATIC BIO-FIREPLACE DALEX C2-70 IN THE PORTAL

VARIANT №1

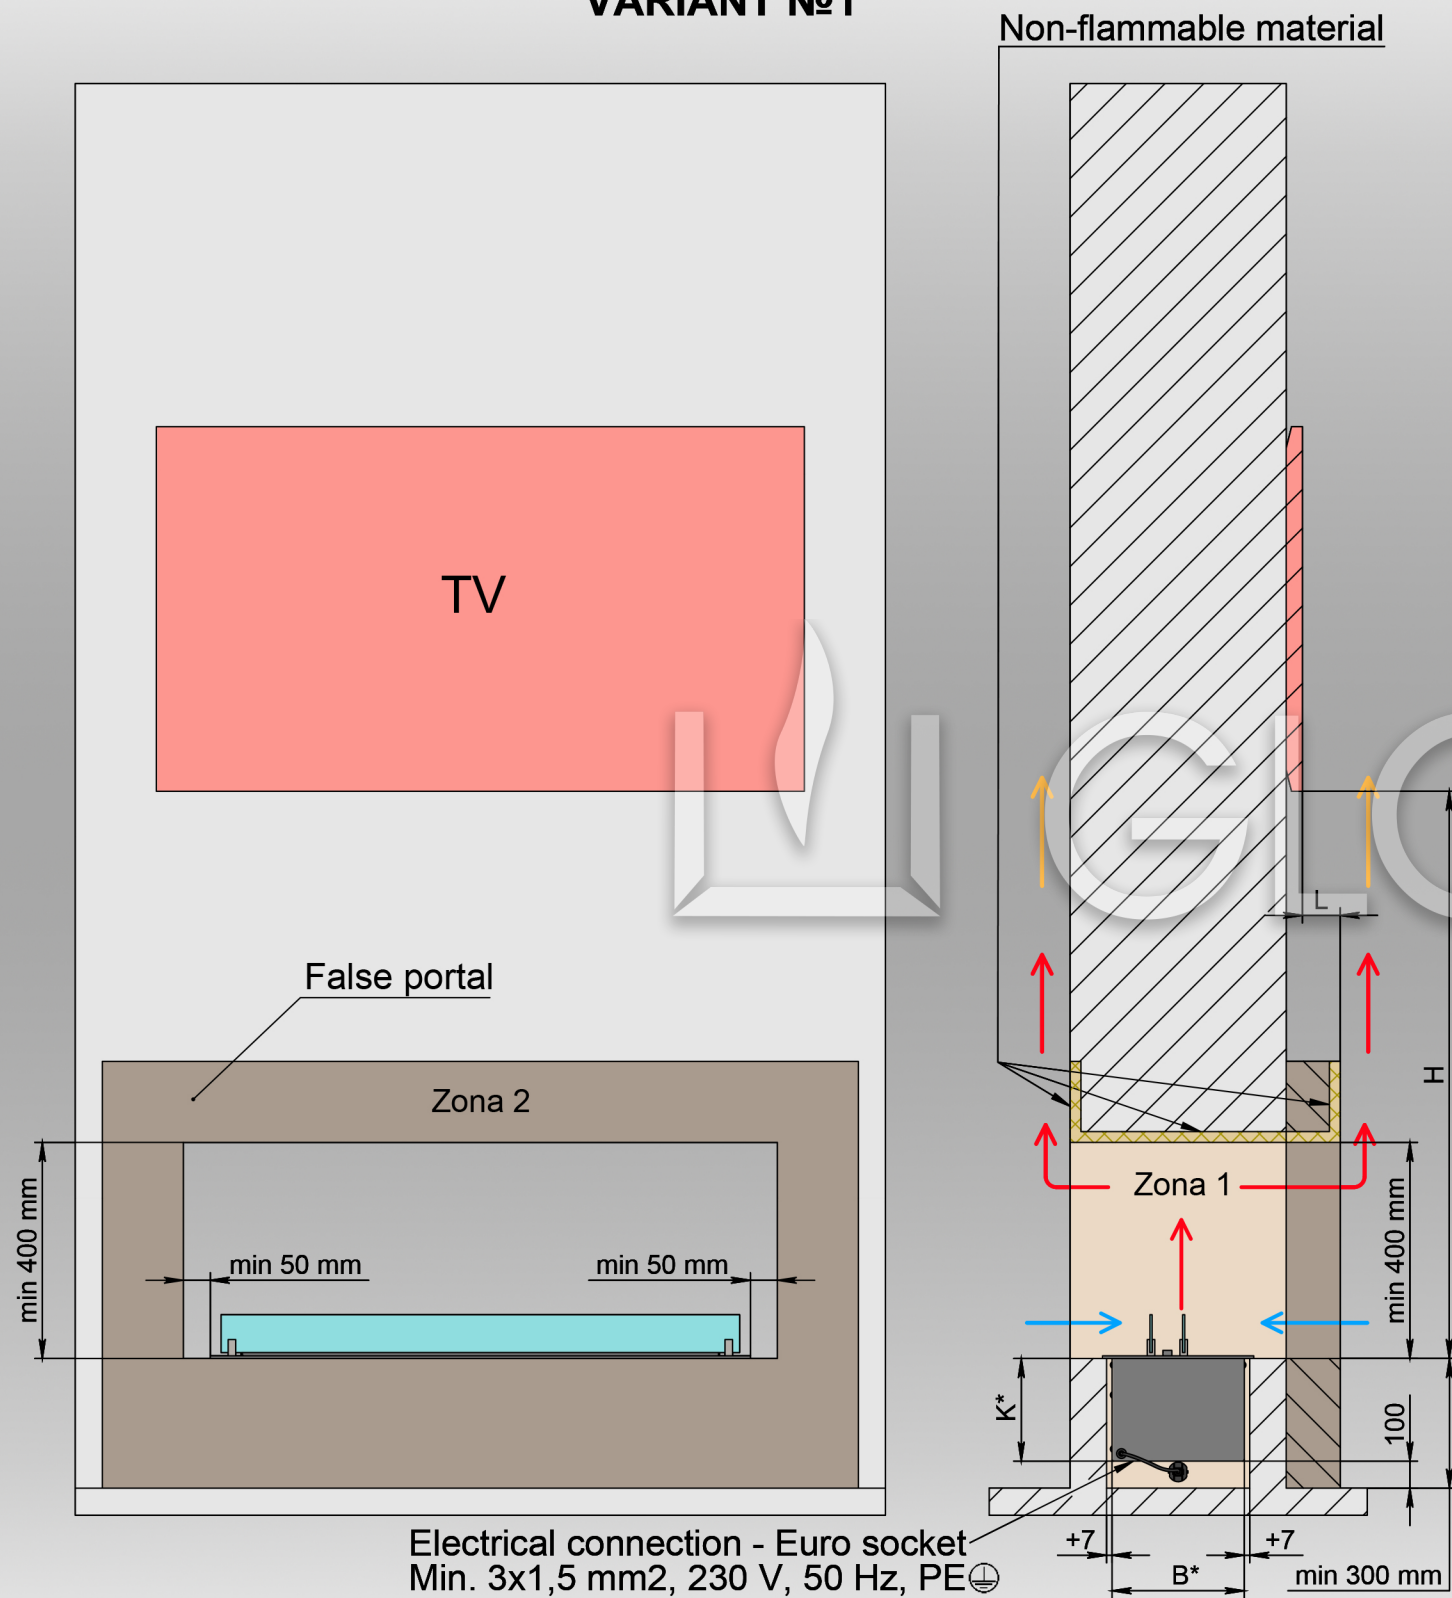

VARIANT №2

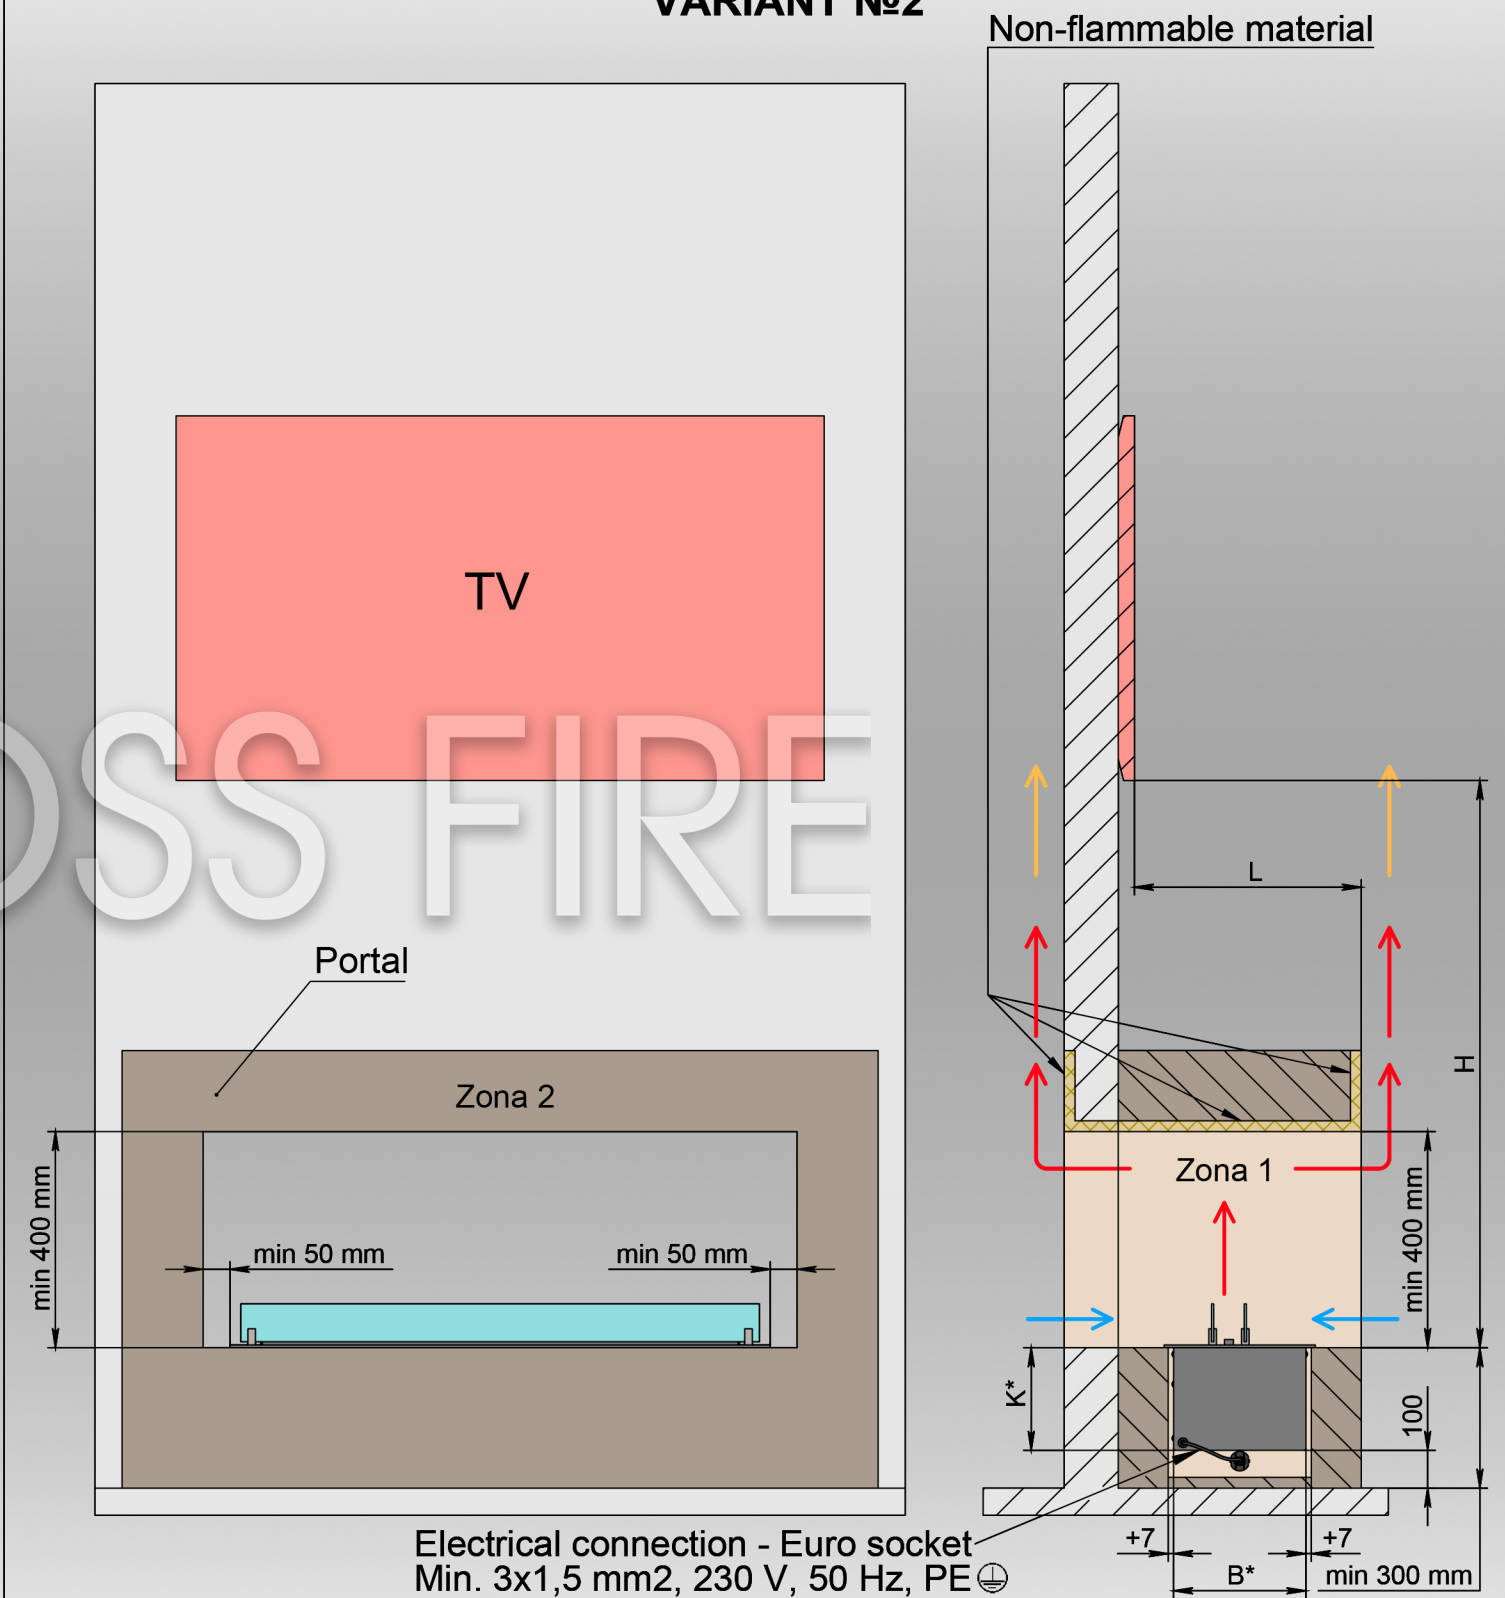

- - cold air
- - warm air
- - hot air

H	L		
	50 mm	51-100 mm	≥101 mm
	min 1100 mm	min 1000 mm	min 900 mm

K*, B* - depends on the type of bio-fireplace. Installing glass on a biofireplace is mandatory. Zone 1 must be made of fireproof materials. Zone 2 must withstand temperatures up to 80°C. Provide a Euro-type plug socket next to the bio-fireplace.