


- Observe the dimensions shown in the drawing.
- Make sure that the surface on which the biofireplace is based is horizontal and symmetrical.
- Electrical connection - Euro socket Min. $3 \times 1,5$ mm², 230 V, 50 Hz, PE⊕

Attention! The use of flammable, melting or deformable materials when finishing a niche is unacceptable. To install a niche, use stone, brick, concrete, foam block, heat-resistant drywall followed by plaster. A niche for a fireplace can be made in a hollow wall, provided that there will be an additional partition underneath it, which will protect the line of fire from unwanted air flows.

Size	Automatic bio fireplace model Dalex corner-art.04							
	D500	D600	D700	D800	D900	D1000	D1100	D1200
L, mm	500	600	700	800	900	1000	1100	1200
L 1, mm	466	566	666	766	866	966	1066	1166

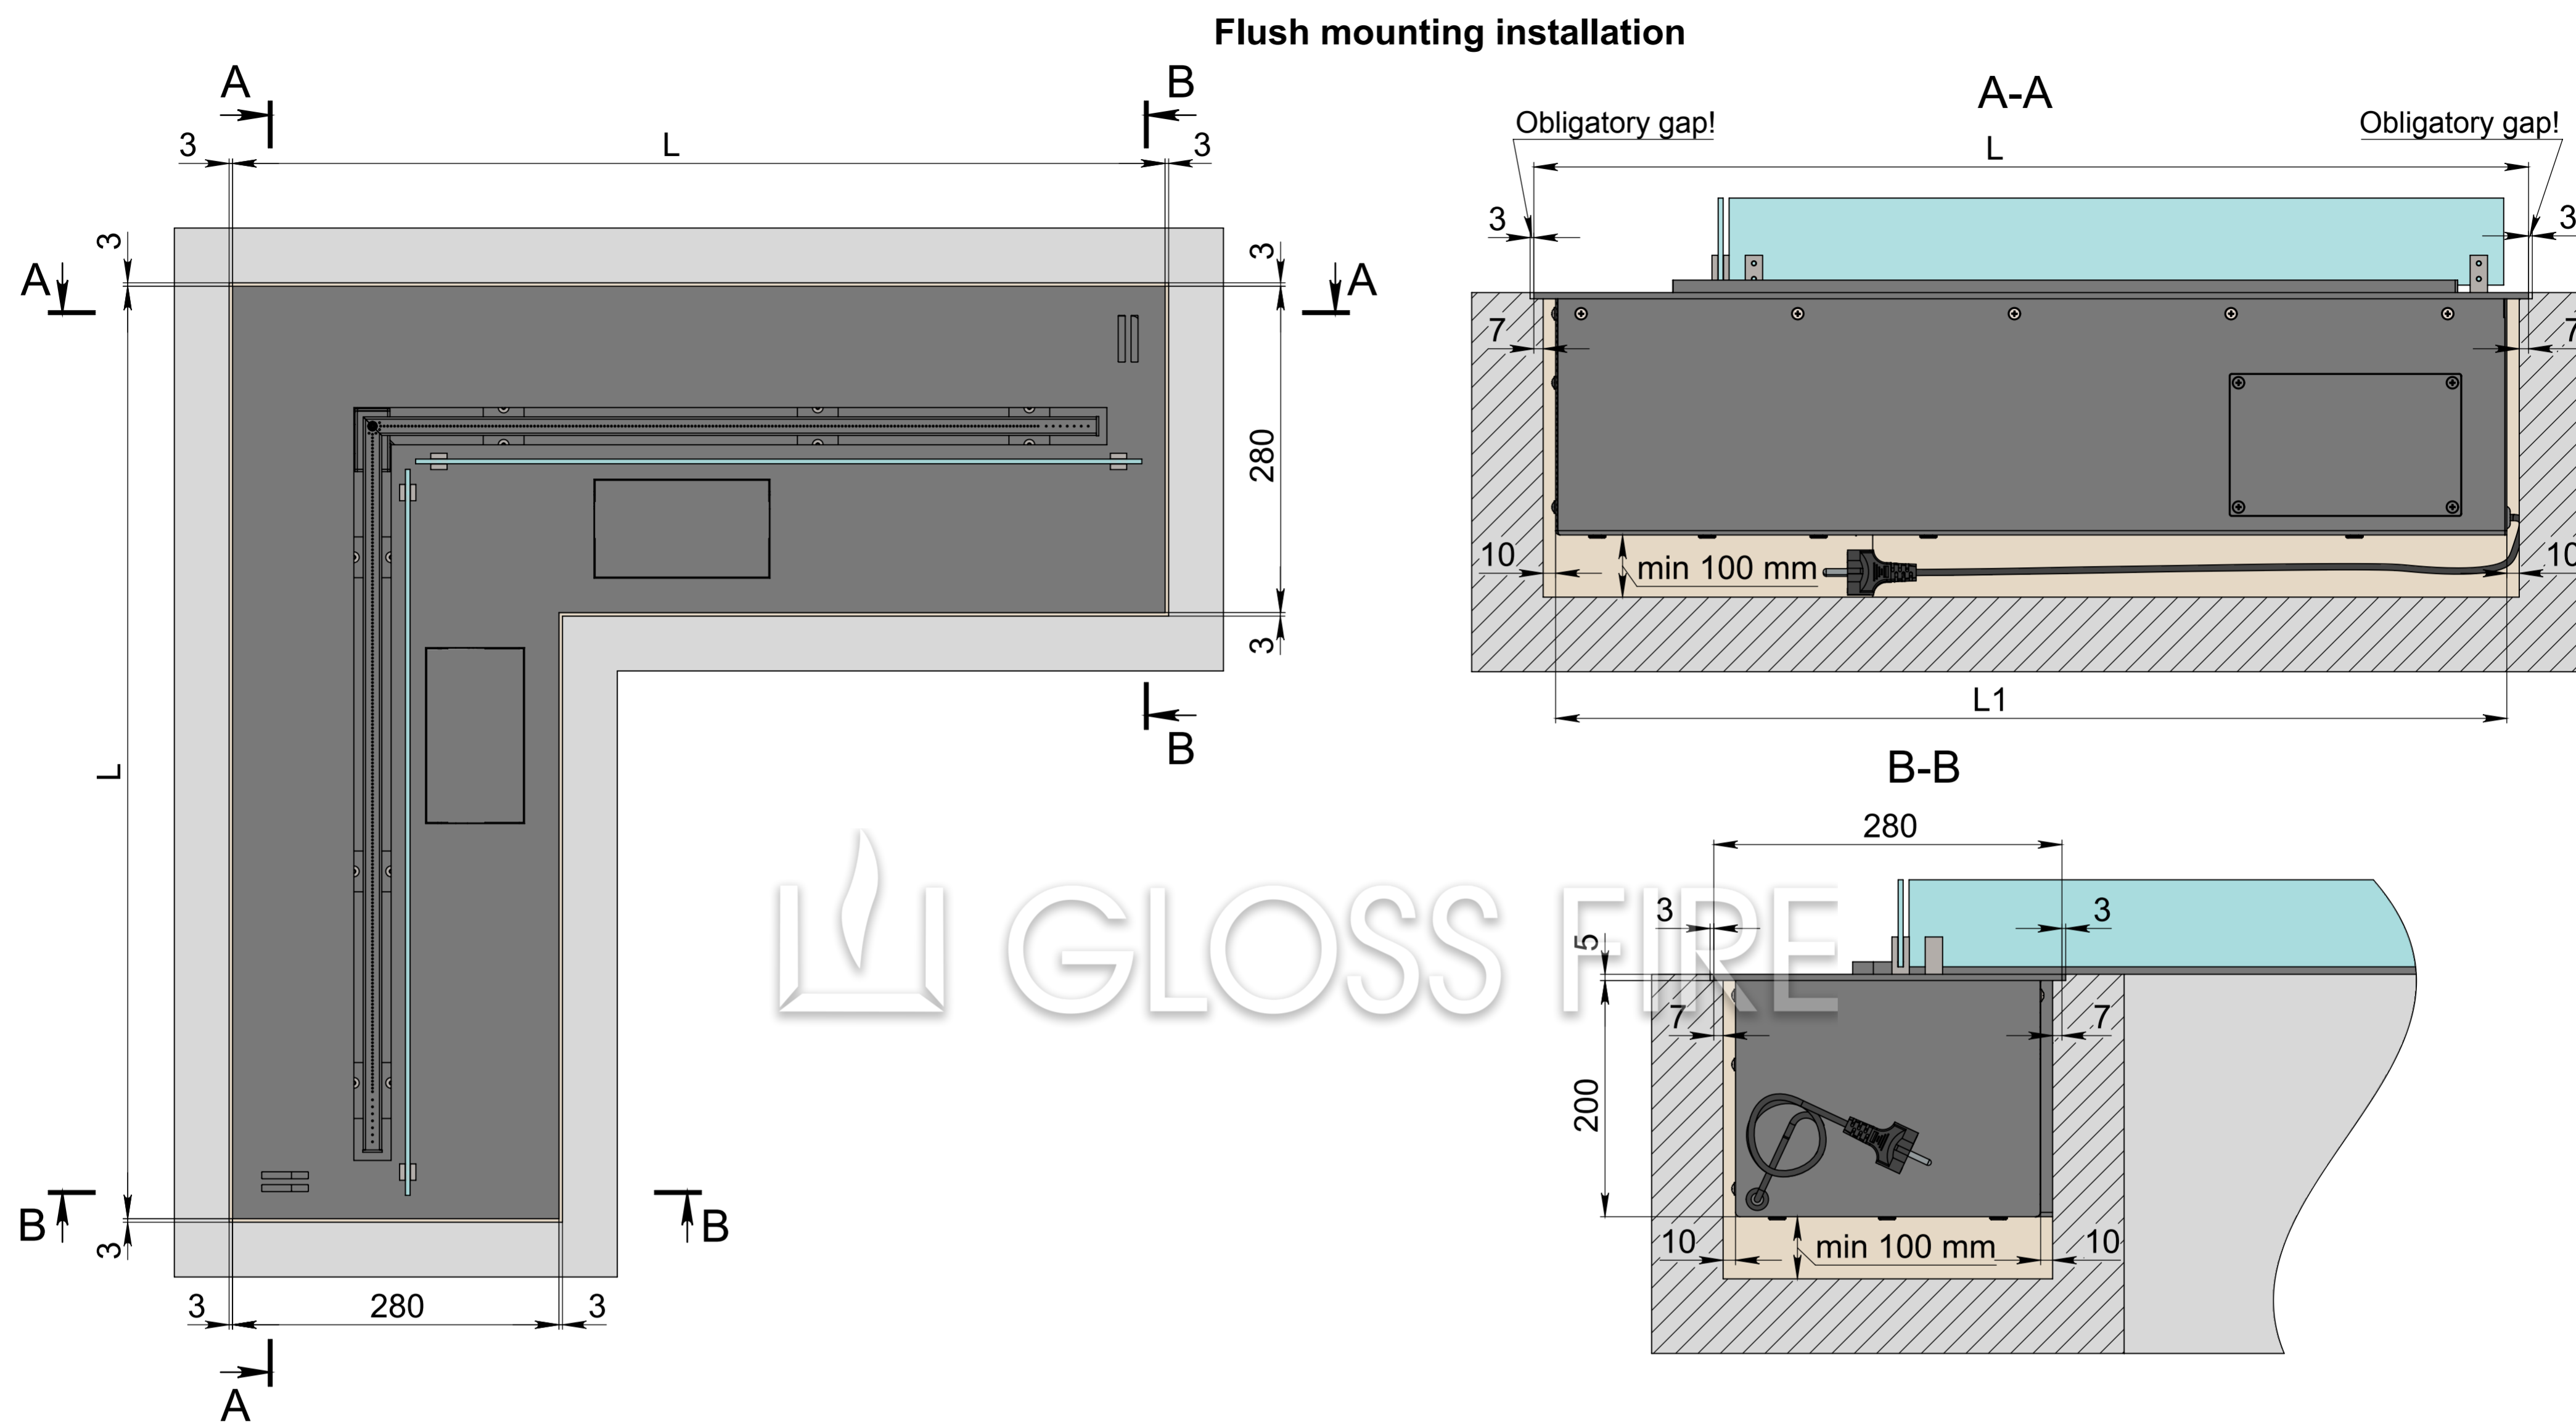

- Observe the dimensions shown in the drawing.
- Make sure that the surface on which the biofireplace is based is horizontal and symmetrical.
- Electrical connection - Euro socket Min. 3x1,5 mm², 230 V, 50 Hz, PE⊕

Attention! The use of flammable, melting or deformable materials when finishing a niche is unacceptable. To install a niche, use stone, brick, concrete, foam block, heat-resistant drywall followed by plaster. A niche for a fireplace can be made in a hollow wall, provided that there will be an additional partition underneath it, which will protect the line of fire from unwanted air flows.

Size	Automatic bio fireplace model Dalex corner-art.04							
	D500	D600	D700	D800	D900	D1000	D1100	D1200
L, mm	500	600	700	800	900	1000	1100	1200
L 1, mm	466	566	666	766	866	966	1066	1166